


TEMPORARY WEB ANCHOR STRAPS

MA	{ TS large and small loop DD large and small D-ring CD loop and D-ring LD large loop and small D-ring	{ 02 2 ft ↓ 20 20 ft

Anchor straps are used to create a secure anchor point by wrapping the strap around an approved anchorage point such as a beam, a truss or a pipe, then passing the small loop or ring through the large loop or ring and pulling it tight.

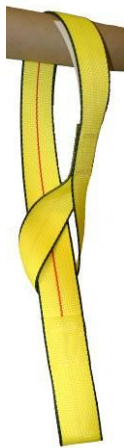

MATS03



MACD03



MADD03



MALD03



Features:

- ◆ Available in custom lengths from 2 ft (610 mm) to 20 ft (6100 mm) in one foot increments
- ◆ Concrete anchor strap (MACD) has a protective sleeve to reduce abrasion

Specifications:

- ◆ 2 inch (50 mm) woven polyester webbing
(Minimum tensile strength 5000 lbs 22.5 kN)

Manufacturer

Authorized Distributor



Safety Direct Ltd.
Sherwood Park AB Canada

www.safetydirect.ca